

Advantium 2 Remote Alarm

Features

- High profile visual and audible notification
- Local audible alarm silence function
- Three channels
Two input and one output
- Dry contact relay output
One general
- NO or NC switch compatibility
- Auto-reset when cylinders are replenished



Specifications

- **Audio**
80 db audible alarm
- **Power**
115 VAC or 220 VAC
- **Relay Contact Rating**
1A@24 VDC or .5A@115 VAC
- **Dimensions**
3 1/4" W x 6" L x 2" D
- **Fuses**
120 VAC, .5A normal blow, type 3AG
220 VAC, .25A normal blow, type 3AG
- **Connections**
Input connector D6
Relay output connector D4


Ordering Information

Part Number	Description
529-5106-120	Single-system remote alarm (110V)
529-5106-220	Single-system remote alarm (220V)
529-5312	Intrinsic Safety Barriers for 529-5106 alarm
529-5316-3	3' cable assembly 6 pin female x 6 pin female
529-5316-10	10' cable assembly 6 pin female x 6 pin female
529-5316-25	25' cable assembly 6 pin female x 6 pin female

Advantium Monitoring Software

Features

- Real Time Systems Monitoring
- Email Or Fax Notification
- 24/7 Data Log
- RS-232 Format
- Program Flexibility

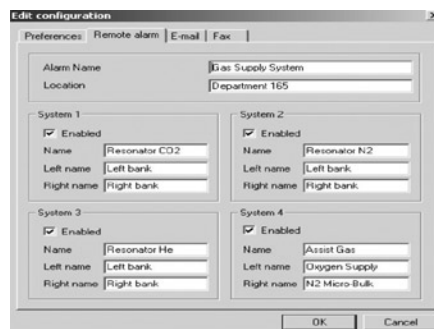

Specifications

- **Compatibility**
Windows 98, ME, NT, 2000, or XP
- **Interface**
RS-232 serial port
- **Email Function Requires Modem with Dial-up Connection or Network Card**

Ordering Information

Part Number	Description
529-5390	Advantium 8 RS232 Monitoring Software

CONCOA

1501 Harpers Road • Virginia Beach, VA 23454 USA
1.800.225.0473 • 757.422.8330 • Fax: 757.422.3125 • www.concoa.com